


In-Wall Timer - 24-Hour Heavy-Duty Mechanical In-Wall Timer, Timer and Toggle Switch, 120 VAC, 20A, SPST, 3 Gang, White

Item KM2ST-3G

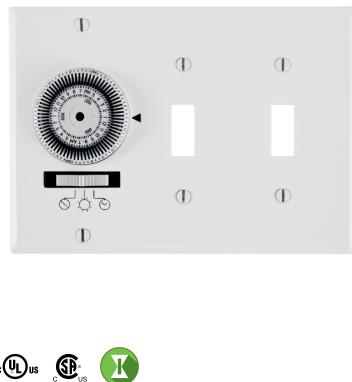

PRODUCT DESCRIPTION

For installing on circuits up to 20 A, this timer provides automatic 24-hour ON/OFF control of outdoor/indoor lighting, fans, pumps, office equipment and other types of loads.

FEATURES

- 72 trippers provide 36 ON/OFF events per 24-hour period
- Captive trippers with 20-minute switching intervals
- 3-way (SPDT) switch available
- 3-position ON/OFF/AUTO override provides continuous ON or OFF operation
- Reliable synchronous timer motor
- Multiple wall plates available
- Easy wiring and installation
- Heavy-Duty 20 A rating
- Requires neutral connection

APPLICATIONS

- Indoor Lighting Control
- Air Movement & Ventilation
- Outdoor Lighting Control

TECHNICAL DATA

General

| | |
|--------------------------------|---|
| Model Number | KM2ST-3G |
| Description | 24-Hour Heavy-Duty Mechanical In-Wall Timer, Timer and Toggle Switch, 120 VAC, 20A, SPST, 3 Gang, White |
| UPC Code | 078275153721 |
| Brand | Intermatic |
| Country of Origin (Intermatic) | MEXICO |
| Warranty Period | 1-Year limited |

Control Specifications

| | |
|-----------------------------|--------------------------------|
| Maximum ON/OFF Operations | 36 |
| Operation Mode | 24 hour |
| Mechanism Type | Analog/Mechanical |
| Minimum ON/OFF Times | 20 min |
| Application Compatibilities | Incandescent; Fluorescent; CFL |

Mechanical Specifications

| | |
|---------------------------|--------|
| Wall Plate Configurations | 3-Gang |
|---------------------------|--------|

Material Specifications

| | |
|---------------------|-------|
| Color | White |
| Includes Wall Plate | Yes |

Load Ratings

| | |
|---------------------------|----------------------|
| Motor Load Ratings Ranges | 1 HP, 120 VAC, 60 Hz |
|---------------------------|----------------------|

| | |
|---|------------------------|
| Incandescent Load Ratings (Multi-Gang) | 1350 W, 120 VAC, 60 Hz |
| Incandescent Multi Gang Load Ratings Ranges | 1350 W, 120 VAC, 60 Hz |
| Inductive Load Ratings Ranges | 8 A, 120 VAC, 60 Hz |

Electrical Specifications

| | |
|-----------------------------|--|
| Input Voltage Range(s) | 120 VAC, 60 Hz |
| Wiring Configurations | Single |
| Switch Type | SPST |
| Neutral Connection Required | Yes |
| Wiring Option | SPST (3) #14 AWG color coded; SPDT (4) #14 AWG color coded |
| Hz | 60 |

Environmental Specifications

| | |
|-------------------------|----------------------------|
| Operating Humidity | 0 to 95%, Non-condensing |
| Temperature (operation) | -40 - 180 °F / -40 - 82 °C |

Packaging

| | |
|---------------------------------------|---------------------|
| Shipping Weight (lbs) | 0.599 |
| Unit Carton Dimensions (H x W x D) in | 2.5 x 4.75 x 7.5 in |

Standards and Certifications

| | |
|--|--------------|
| UL Certification | cULus |
| CSA Certification | cCSAus |
| Other Certifications and Compatibilities | Green Energy |
| California Proposition 65 | DEHP |
| RoHS Certification | N/A |

ACCESSORIES



24-00042

Wall Plate for KM2ST-3G, 3 Gang (Timer and 2 Toggle Switches), White