


In-Wall Timer - 24-Hour Heavy-Duty Mechanical In-Wall Timer, Timer and Decorator Switch, 120 VAC, 20A, SPST, 3 Gang, White

Item KM2ST-3D

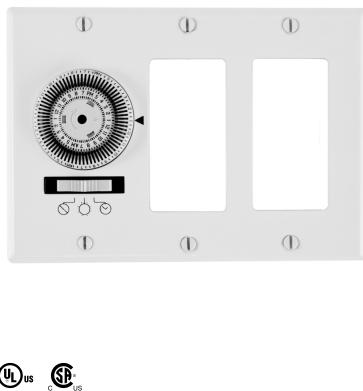

PRODUCT DESCRIPTION

For installing on circuits up to 20 A, this timer provides automatic 24-hour ON/OFF control of outdoor/indoor lighting, fans, pumps, office equipment and other types of loads.

FEATURES

- 72 trippers provide 36 ON/OFF events per 24-hour period
- Captive trippers with 20-minute switching intervals
- 3-way (SPDT) switch available
- 3-position ON/OFF/AUTO override provides continuous ON or OFF operation
- Reliable synchronous timer motor
- Multiple wall plates available
- Easy wiring and installation
- Heavy-Duty 20 A rating
- Requires neutral connection

APPLICATIONS

- Indoor Lighting Control
- Air Movement & Ventilation
- Outdoor Lighting Control

TECHNICAL DATA

General

Model Number	KM2ST-3D
Description	24-Hour Heavy-Duty Mechanical In-Wall Timer, Timer and Decorator Switch, 120 VAC, 20A, SPST, 3 Gang, White
UPC Code	614573043519
Brand	Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	1-Year limited

Control Specifications

Maximum ON/OFF Operations	36
Operation Mode	24 hour
Mechanism Type	Analog/Mechanical
Minimum ON/OFF Times	20 min
Application Compatibilities	Incandescent; Fluorescent; CFL

Mechanical Specifications

Wall Plate Configurations	3-Gang
---------------------------	--------

Material Specifications

Color	White
Includes Wall Plate	Yes

Load Ratings

Motor Load Ratings Ranges	1 HP, 120 VAC, 60 Hz
---------------------------	----------------------

Incandescent Load Ratings (Multi-Gang)	1350 W, 120 VAC, 60 Hz
Incandescent Multi Gang Load Ratings Ranges	1350 W, 120 VAC, 60 Hz
Inductive Load Ratings Ranges	8 A, 120 VAC, 60 Hz

Electrical Specifications

Input Voltage Range(s)	120 VAC, 60 Hz
Wiring Configurations	Single
Switch Type	SPST
Neutral Connection Required	Yes
Wiring Option	SPST (3) #14 AWG color coded; SPDT (4) #14 AWG color coded
Hz	60

Environmental Specifications

Operating Humidity	0 to 95%, Non-condensing
Temperature (operation)	-40 - 180 °F / -40 - 82 °C

Packaging

Shipping Weight (lbs)	0.539
Unit Carton Dimensions (H x W x D) in	2.5 x 4.75 x 7.5 in

Standards and Certifications

UL Certification	cULus
CSA Certification	cCSAus
California Proposition 65	DEHP