


Hour Meter - AC Hour Meter

Item UWZ52E-120

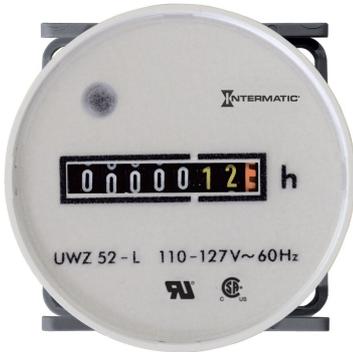

PRODUCT DESCRIPTION

Flush mounted with bracket, the UWZ52E with round face is fastened with a plastic slip-on retaining bracket.

APPLICATIONS

- ▶ Monitoring
- ▶ Distribution/Control Panel



TECHNICAL DATA

General

| | |
|--------------------------------|---------------------|
| Model Number | UWZ52E-120 |
| Description | AC Hour Meter |
| UPC Code | 078275153646 |
| Brand | Domestic Intermatic |
| Country of Origin (Intermatic) | MEXICO |
| Warranty Period | 1-Year limited |

Control Specifications

| | |
|------------------|----------|
| Capacity (Hours) | 99999.99 |
|------------------|----------|

Mechanical Specifications

| | |
|---------------------------|---------------------------|
| Mounting Options | Flush |
| Number of Digits (Hours) | 5 |
| Number of Digits (Tenths) | 2 |
| Mounting Description | slip-on retaining bracket |
| Mechanical Movement | Synchronous |

Dimensions

| | |
|-----------------------------|------|
| Mounting Depth (mm) | 42 |
| Mounting Depth (in) | 1.65 |
| Product Diameter (in) | 2.28 |
| Product Diameter (mm) | 58 |
| Panel Opening Diameter (in) | 1.77 |
| Panel Opening Diameter (mm) | 45 |
| Panel Opening Height (in) | 1.77 |
| Panel Opening Height (mm) | 45 |
| Panel Opening Width (in) | 1.77 |
| Panel Opening Width (mm) | 45 |
| Digits Height (mm) | 4.1 |

| | |
|---------------------|------|
| Digits Height (in) | 0.16 |
| Bezel Width (mm) | 48 |
| Bezel Diameter (in) | 2.28 |
| Bezel Height (mm) | 48 |
| Bezel Width (in) | 1.89 |
| Bezel Height (in) | 1.89 |
| Bezel Diameter (mm) | 58 |

Material Specifications

| | |
|--------------------------|-----------------|
| Color | Light Gray |
| Digits Coloring (Hours) | White on Black |
| Digits Coloring (Tenths) | Yellow on Black |
| Hour Meter Material | Plastic |

Electrical Specifications

| | |
|--------------------------------|--------------------------|
| Maximum Power Consumption (VA) | 1 |
| Wiring Option | 1/4" Spade w/screw clamp |
| Input Voltage Range(s) | 120 VAC, 60 Hz |
| Hz | 60 |

Packaging

| | |
|---------------------------------------|-----------------------|
| Shipping Weight (lbs) | 0.18 |
| Unit Carton Dimensions (H x W x L) in | 1.57 x 2.28 x 2.28 in |

Environmental Specifications

| | |
|-------------------------|--------------------------------------|
| Environmental Rating | IP21 |
| Temperature (operation) | -40 °F to 160 °F / (-40 °C to 72 °C) |

Standards and Certifications

| | |
|--|---------|
| UL Certification | RU |
| CSA Certification | cCSAus |
| Other Certifications and Compatibilities | RU |
| RU File Number | #E22587 |
| California Proposition 65 | None |
| RoHS Certification | Y |