


**Mechanical Time Switch** - 24-Hour Mechanical Time Switch, 208-277 VAC, 60Hz, SPDT, Indoor Metal Enclosure, 15 Minute Interval, Mexico Sales Only

Item T1906MX

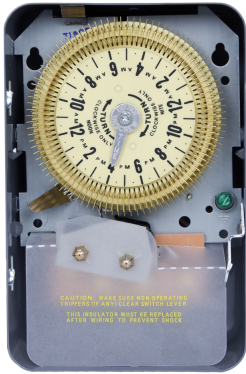

**NOM**

**PRODUCT DESCRIPTION**

This series of mechanical time switches offers more flexible scheduling capabilities by offering 15-minute intervals. These units also come with trippers that slide in or out easily for fast and accurate settings. All units can control up to 20 A of electrical load and have a single pole, double throw switch.

**FEATURES**

- Provides up to 96 operations (48 ON/48 OFF) every 24 hours
- Models with skipper wheel allow for operations to be omitted on selected days of the week
- 15-minute intervals
- Captive trippers slide in and out of dial for fast, accurate setting

**APPLICATIONS**

- Timing/Scheduling ON/OFF
- Indoor Lighting Control

**TECHNICAL DATA**

| General                           |                                                                                                                        |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Model Number                      | T1906MX                                                                                                                |
| Description                       | 24-Hour Mechanical Time Switch, 208-277 VAC, 60Hz, SPDT, Indoor Metal Enclosure, 15 Minute Interval, Mexico Sales Only |
| UPC Code                          | 078275193215                                                                                                           |
| Brand                             | Intermatic                                                                                                             |
| Country of Origin (Intermatic)    | MEXICO                                                                                                                 |
| Warranty Period                   | 1-Year limited                                                                                                         |
| Control Specifications            |                                                                                                                        |
| Minimum ON/OFF Times              | 15 min                                                                                                                 |
| Maximum ON/OFF Operations         | 48                                                                                                                     |
| Skipper Wheel                     | Not Included                                                                                                           |
| Operation Mode                    | 24 hour                                                                                                                |
| Has Manual Override               | Yes                                                                                                                    |
| Mechanical Specifications         |                                                                                                                        |
| Enclosure Type                    | Indoor type 1 metal                                                                                                    |
| Number of Trippers Included       | 96                                                                                                                     |
| Dimensions                        |                                                                                                                        |
| Product Dimensions (H x W x D) in | 7.875 x 5.125 x 3.437 in                                                                                               |
| Wire Size Min                     | #14 AWG                                                                                                                |
| Wire Size Max                     | #12 AWG                                                                                                                |
| Load Ratings                      |                                                                                                                        |
| Resistive Load Ratings Ranges     | 20 A, 125-480 VAC, 60 Hz                                                                                               |
| Motor Load Ratings Ranges         | 1/2 HP, 125 VAC, 60 Hz; 1 HP, 250 VAC, 60 Hz                                                                           |



Electrical Specifications

|                               |                    |
|-------------------------------|--------------------|
| Wiring Option                 | Terminals          |
| Input Voltage Range(s)        | 208-277 VAC, 60 Hz |
| Number of Circuits            | 1                  |
| Switch Type                   | SPDT               |
| Maximum Power Consumption (W) | 3 W                |
| Hz                            | 60                 |

Packaging

|                                       |                     |
|---------------------------------------|---------------------|
| Shipping Weight (lbs)                 | 2.745               |
| Unit Carton Dimensions (H x W x L) in | 8.25 x 3.5 x 5.5 in |

Environmental Specifications

|                         |                                      |
|-------------------------|--------------------------------------|
| Temperature (operation) | -40 °F to 130 °F / (-40 °C to 54 °C) |
|-------------------------|--------------------------------------|

Standards and Certifications

|                                          |      |
|------------------------------------------|------|
| Other Certifications and Compatibilities | NOM  |
| California Proposition 65                | None |
| RoHS Certification                       | N/A  |

ACCESSORIES



124T907A  
Insulator Assembly (S001)



133T701A  
Replacement Snap Switch for T1900  
and T2000 Series



156T1950A  
Set of 12 Trippers for T1900, T2000,  
C8800, R8800 and T8800 Series

156T1950AD12  
12 Bags of 156T1950A Trippers for  
T1900, T2000, C8800, R8800, and  
T8800 Series



WG730-14D  
125 VAC, 60 Hz Motor for R8800,  
T1900, T1970, and T8800 Series



WG730-14DMX  
125 VAC, 60 Hz Motor for R8800,  
T1900, T1970, and T8800 Series



WG733-14D  
208-277 VAC, 60 Hz Motor for R8800,  
T1900, T1970, and T8800 Series



WG733-14DMX  
208-277 VAC, 60 Hz Motor for R8800,  
T1900, T1970, and T8800 Series



156T2978A  
Package Accessory Trippers



WG736-14D  
480 V, 60 Hz Motor for T1900, T8800,  
R8800 Series