


Electronic Timer Control - Astronomic 365-Day 16-Circuit Electronic Control, 120-277 VAC, 50/60 Hz, 16-SPDT/8-DPDT, Outdoor Metal Enclosure, Ethernet Included

Item ET91615CR

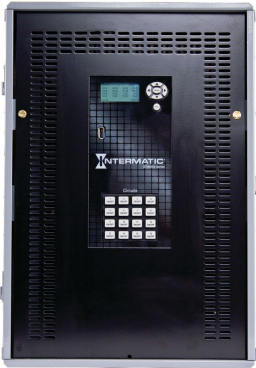

PRODUCT DESCRIPTION

The ET90000 Series combines powerful and intuitive scheduling with truly maintenance-free convenience and included capability of a 2 hour override. The PC App provides real-time remote control, and the USB connection and Ethernet capabilities enable in-field updates. These products can be used to help meet Title 24 requirements.

FEATURES

- ▶ Automatic input voltage selection from 120 to 277 VAC, 50/60 Hz
- ▶ Over 2,000 events plus holiday schedules
- ▶ Allows for simple override control when paired with MS-101-WH Momentary Switch (sold separately)
- ▶ Advanced scheduling including relative events, such as fourth Thursday of November or first week of year
- ▶ 30 A rated contacts
- ▶ 100-hour supercapacitor eliminates the need for batteries
- ▶ USB connection for uploading, downloading and transferring programs
- ▶ Easy-to-follow on-screen menus for programming to-the-minute accuracy
- ▶ Non-volatile memory protects programming indefinitely
- ▶ Firmware can be upgraded in-field via USB or Ethernet
- ▶ Internally expandable, in 4-circuit increments, up to 16-circuits for 4, 8, and 12-circuit models

APPLICATIONS

- ▶ Indoor Lighting Control
- ▶ Outdoor Lighting Control
- ▶ Timing/Scheduling ON/OFF
- ▶ Machinery & Pump Controls

TECHNICAL DATA

General	
Model Number	ET91615CR
Description	Astronomic 365-Day 16-Circuit Electronic Control, 120-277 VAC, 50/60 Hz, 16-SPDT/8-DPDT, Outdoor Metal Enclosure, Ethernet Included
UPC Code	078275124943
Brand	Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	3-Year limited
Control Specifications	
Minimum ON/OFF Times	1 Sec
Minimum Pulse Time	1 sec
Maximum Pulse Time	23 hours, 59 minutes
Maximum ON/OFF Times	365 days
Operation Features	Astronomic; Holiday
Operation Mode	365 day
Data Transfer Options	Ethernet Optional/USB
Daylight Savings Adjustment	Automatic
Backup Restoration Time	30 Minutes

Backup Type	Supercapacitor
Backup Protection Time	100 Hour
On Events	2000
Off Events	2000
Total Events	2000

Mechanical Specifications

Enclosure Type	Outdoor type 3R metal
----------------	-----------------------

Dimensions

Product Dimensions (H x W x D) in	17.9 x 12.7 x 5.4 in
-----------------------------------	----------------------

Material Specifications

Color	Black
-------	-------

Communication Method

Has WiFi	No
----------	----

Load Ratings

Tungsten (NO) Load Ratings	5 A, 12 VAC, 50 Hz; 5 A, 24 VAC, 50 Hz; 5 A, 50 VAC, 50 Hz; 5 A, 110 VAC, 50 Hz; 5 A, 115 VAC, 50 Hz; 5 A, 120 VAC, 50 Hz; 5 A, 12 VAC, 60 Hz; 5 A, 24 VAC, 60 Hz; 5 A, 50 VAC, 60 Hz; 5 A, 110 VAC, 60 Hz; 5 A, 115 VAC, 60 Hz; 5 A, 120 VAC, 60 Hz
Magnetic Ballast (NO) Range(s)	20 A, 120-277 VAC, 50/60 Hz
Magnetic Ballast (NC) Range(s)	3 A, 120-277 VAC, 50/60 Hz
Resistive (NO) Range(s)	20 A, 28 VDC; 30 A, 12-240 VAC, 50/60 Hz
Resistive (NC) Range(s)	10 A, 28 VDC; 10 A, 12-240 VAC, 50/60 Hz
Pilot Duty (NO) Range(s)	470 VA, 120-240 VAC, 50/60 Hz
Pilot Duty (NC) Range(s)	275 VA, 120-240 VAC, 50/60 Hz
General Purpose (NC) Range(s)	10 A, 12-240 VAC, 50/60 Hz
General Purpose (NO) Range(s)	30 A, 12-240 VAC, 50/60 Hz
Electronic Ballast Load Ratings NO Ranges	8 A, 120-277 VAC, 50/60 Hz
Tungsten (NO) Range(s)	5 A, 12-120 VAC, 50/60 Hz
Motor Load Ratings NC Ranges	1/4 HP, 120 VAC, 50/60 Hz; 1/2 HP, 240 VAC, 50/60 Hz
Motor Load Ratings NO Ranges	1 HP, 120 VAC, 50/60 Hz; 2 HP, 240 VAC, 50/60 Hz

Electrical Specifications

Voltage Selection Type	Auto-Voltage
Wiring Option	Terminals
Input Voltage Range(s)	120-277 VAC, 50/60 Hz
Number of Circuits	16
Switch Type	16xSPDT; 8xDPDT
Maximum Power Consumption (W)	50 W
Electronic Series	ET90000 Series
Hz	50/60
Amperage	30 A

Packaging



Shipping Weight (lbs)	21.355
Unit Carton Dimensions (H x W x L) in	9 x 17.25 x 22.625 in

Environmental Specifications

Temperature (operation)	-40 °F to 104 °F / (-40 °C to 40 °C)
-------------------------	--------------------------------------

Standards and Certifications

UL Certification	cULus
CSA Certification	cCSAus
Other Certifications and Compatibilities	Title 20; Green Energy +
California Proposition 65	Lead
RoHS Certification	N/A

ACCESSORIES



ET-NF
RC Snubber Noise Filter 24-277 VAC for Electronic Controls