


## GR\_Analog Time Switches - Electromechanical Synchronous clock, 24-Hour, 220-240 VAC, 50 Hz, Surface Mount Timer Module with Manual Override, 15 minute Intervals, 16 A, SPDT - TCC 111.1 180

Item 018000011

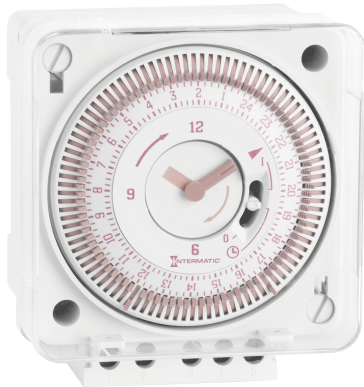

### PRODUCT DESCRIPTION

The universal time switches from the TCC product family offer versatility in the entire building and in the outdoor area. They are used in switching systems, in machine control systems, as well as specific solutions such as swimming pools or sprinkler systems. The analogue 1-channel universal time switches of the TCC series are suitable for assembly, installation and DIN rail mounting, are easy to operate and are equipped with a quartz or synchronous drive.

### FEATURES

- ▶ 16 A, 250 VAC SPDT switch
- ▶ Synchronous drive
- ▶ Captive tripper levers with 15 minute intervals
- ▶ Manual override, ON-AUTO-OFF
- ▶ Easy-set, true clock face
- ▶ Surface, DIN rail or flush mounting
- ▶ Clear plastic dust cover
- ▶ Compact size

### APPLICATIONS

- ▶ Air Movement & Ventilation
- ▶ Distribution/Control Panel
- ▶ Distribution Panel
- ▶ Indoor Lighting Control
- ▶ Landscape Lighting
- ▶ Landscape Water Control
- ▶ Machinery & Pump Controls
- ▶ Motor Control
- ▶ Outdoor Lighting Control
- ▶ Outdoor Water Fountains
- ▶ Pool Pump
- ▶ Pump Control
- ▶ Septic Treatment
- ▶ Timing/Scheduling ON/OFF

### TECHNICAL DATA

General	
Model Number	018000011
Description	Electromechanical Synchronous clock, 24-Hour, 220-240 VAC, 50 Hz, Surface Mount Timer Module with Manual Override, 15 minute Intervals, 16 A, SPDT - TCC 111.1 180
UPC Code	999999999993
Country of Origin (Intermatic)	MEXICO
Warranty Period	1-Year limited
TARIC HS Code	9107.00.00
Control Specifications	
Clock Drive Type	Synchronous
Backup Protection Time	No
Mechanism Type	Analog/Mechanical

**Dimensions**

Product Dimensions (H x W x D) mm	80 x 72 x 55 mm
Product Dimensions (H x W x D) in	3.14 x 2.83 x 2.165 in

**Material Specifications**

Color	Gray
-------	------

**Electrical Specifications**

Input Voltage Range(s)	220-240 VAC
Accuracy	Mains synchronized
Current Output	Changeover, Potential-free
Input Voltage Frequencies	50 Hz

**Display and Format**

Shortest switching time	ON/OFF 15 minutes
-------------------------	-------------------

**Packaging**

Shipping Weight (kg)	0.063
Shipping Weight (lbs)	0.139
Product Weight (kg)	0.155
Product Weight (lbs)	0.341
Unit Carton Dimensions (H x W x D) in	1.271 x 2.842 x 2.842 in

**Operating Specifications**

Channels	1
Manual switch	ON/OFF/AUTO
Program	Daily Program (ON/OFF)

**Environmental Specifications**

Temperature (operation)	-20 - 55 °C / -4 - 131 °F
-------------------------	---------------------------

**Standards and Certifications**

Other Certifications and Compatibilities	CE
California Proposition 65	None
RoHS Certification	Y

---

**ACCESSORIES**



017800022  
Base, 1-Channel, TCC Series



014500176  
Seal, TCC Series