


Electromechanical Time Switch -

Item WH40

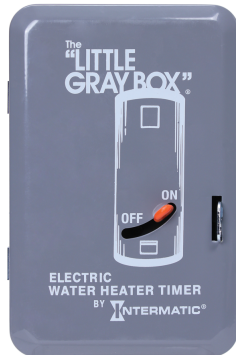

PRODUCT DESCRIPTION

With the easy-to-set "Yellow Dial," these time switches allow for basic control of electric water heaters. These time switches offer a minimum ON/OFF time of one hour, and are available for 208-250 VAC applications. With the proven reliability of our mechanical line, these time switches provide dependable electric water heater control.

FEATURES

- ▶ Two sets of ON/OFF trippers
- ▶ Enables shifting electricity use into off-peak hours to reduce energy costs
- ▶ Convenient external override switch
- ▶ Up to 12 ON/12 OFF events

APPLICATIONS

- ▶ Agriculture Feeders
- ▶ Greenhouse Misting Control
- ▶ Water Heater Control

TECHNICAL DATA

General

Model Number	WH40
UPC Code	078275007406
Brand	Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	1-Year limited

Control Specifications

Minimum ON/OFF Times	1 hour
Operation Mode	24 hour
Mechanism Type	Analog/Mechanical
Has Manual Override	Yes
Has Override Switch	Yes
Application Compatibilities	Electric Water Heater
On Events	12
Off Events	12
Total Events	24

Mechanical Specifications

Enclosure Type	Indoor type 1 metal
Number of Trippers Included	2 ON/2 OFF

Dimensions

Product Dimensions (H x W x D) in	7.875 x 5.125 x 3.437 in
Wire Size Min	#14 AWG
Wire Size Max	#8 AWG
Knockout Dimensions Bottom	(2) combination 1/2" - 3/4"
Knockout Dimensions Back	(1) combination 1/2" - 3/4"

Knockout Dimensions Left	(1) combination 1/2" - 3/4"
--------------------------	-----------------------------

Material Specifications

Color	Gray
-------	------

Load Ratings

Resistive (NO) Range(s)	40 Max, 208-277 VAC
Clock Motor Voltage	208/277 VAC, 60 Hz

Electrical Specifications

Wiring Option	Terminals
Input Voltage Range(s)	208-277 VAC, 60 Hz
Switch Type	DPST
Maximum Power Consumption (W)	3 W
Watts	10000
Hz	60
Amperage	40 A

Packaging

Shipping Weight (lbs)	2.794
Unit Carton Dimensions (H x W x L) in	8.25 x 3.5 x 5.5 in

Environmental Specifications

Temperature (operation)	-40 °F to 130 °F / (-40 °C to 54 °C)
-------------------------	--------------------------------------

Standards and Certifications

UL Certification	cULus
CSA Certification	cCSAus
Other Certifications and Compatibilities	Green Energy
UL File Number	UL917
California Proposition 65	Lead
RoHS Certification	N/A

ACCESSORIES



124T1952
Insulator for Double-Pole Time Switch (T103, T104, T105, T173, T174, T175, T100, T7000, and WH40 T176, T185, WH40)



156T1978AMX
1 Set of ON/OFF Trippers for T100, T7000, and WH40

156T3225A
Trippers (2) Sets (ON/OFF) for T7000, WH Series (With ON/OFF Markings)



WG1571-10D
MOTOR-BOXED, 125V 50HZ



156T1978A
Extra/replacement trippers 1 ON and 2 OFF