


## In-Wall Timer - Spring Wound Countdown Timer - Decorator Style

Item SW60MWK

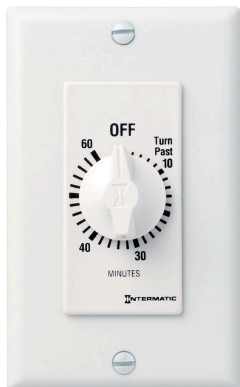

### PRODUCT DESCRIPTION

The SW Series Decorator Countdown Timers are designed to replace any standard or decorator style wall switch, single- or multi-gang. These mechanical timers do not require electricity to operate. They automatically limit the ON times for fans, lighting, motors, heaters and other energy consuming loads. \*NOTE: Not for use with sunlamps, saunas, or loads that could cause personal injury if timed incorrectly.

### FEATURES

- ▶ 60-Minute timer
- ▶ SPST (Single-Pole Single-Throw)
- ▶ Breaks circuit at end of timing cycle
- ▶ No electricity required to operate
- ▶ Replaces any standard or decorator single- or multi-gang wall switch
- ▶ Automatically limits ON time for energy consuming loads
- ▶ Quick and easy installation
- ▶ Time-saving up front terminal connection with teeter-type terminals
- ▶ Incandescent/fluorescent/CFL/LED compatible
- ▶ No neutral connection is required

### TECHNICAL DATA

#### General

Model Number	SW60MWK
Description	Spring Wound Countdown Timer - Decorator Style
UPC Code	078275143494
Brand	Intermatic
Country of Origin (Intermatic)	TUNISIA
Warranty Period	1-Year limited
TARIC HS Code	9107.00.00

#### Control Specifications

Time Presets	60 min
Operation Mode	Countdown
Countdown Time	60 min
Mechanism Type	Analog/Mechanical
Application Compatibilities	Incandescent; Fluorescent; CFL; LED

#### Mechanical Specifications

Wall Plate Configurations	Single-Gang; Multi-Gang
---------------------------	-------------------------

#### Dimensions

Product Dimensions (H x W x D) in	4.125 x 1.75 x 1.25 in
-----------------------------------	------------------------

#### Material Specifications

Color	White
Finish	Gloss

#### Load Ratings

Resistive Heater	20 A, 2500 W, 125 VAC; 10 A, 2500 W, 250 VAC; 10 A, 2770 W, 277 VAC
------------------	---

Tungsten Incandescent Load Ratings NO Ranges	7 A, 125 VAC, 875 W
--	---------------------

**Electrical Specifications**

Input Voltage Range(s)	125-277 VAC, 50/60 Hz
Wiring Configurations	Single
Switch Type	SPST
Watts	2500
Hz	50/60
Amperage	20 A

**Environmental Specifications**

Temperature (operation)	40 - 120 °F / 4 - 49 °C
-------------------------	-------------------------

**Packaging**

Shipping Weight (lbs)	0.35
Unit Carton Dimensions (H x W x D) in	4.625 x 2.125 x 2.875 in

**Standards and Certifications**

UL Certification	RU
CSA Certification	cCSAus
Other Certifications and Compatibilities	Green Energy
California Proposition 65	DEHP