


Electronic Timer Control - Astronomic 365-Day 16-Circuit Electronic Control, 120-277 VAC, 50/60 Hz, 16-SPDT/8-DPDT, Outdoor Metal Enclosure, Ethernet Included

Item ET91615CR

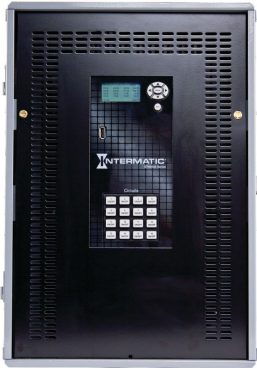

PRODUCT DESCRIPTION

The ET90000 Series combines powerful and intuitive scheduling with truly maintenance-free convenience and included capability of a 2 hour override. The PC App provides real-time remote control, and the USB connection and Ethernet capabilities enable in-field updates. These products can be used to help meet Title 24 requirements.

FEATURES

- ▶ Automatic input voltage selection from 120 to 277 VAC, 50/60 Hz
- ▶ Over 2,000 events plus holiday schedules
- ▶ Allows for simple override control when paired with MS-101-WH Momentary Switch (sold separately)
- ▶ Advanced scheduling including relative events, such as fourth Thursday of November or first week of year
- ▶ 30 A rated contacts
- ▶ 100-hour supercapacitor eliminates the need for batteries
- ▶ USB connection for uploading, downloading and transferring programs
- ▶ Easy-to-follow on-screen menus for programming to-the-minute accuracy
- ▶ Non-volatile memory protects programming indefinitely
- ▶ Firmware can be upgraded in-field via USB or Ethernet
- ▶ Internally expandable, in 4-circuit increments, up to 16-circuits for 4, 8, and 12-circuit models

APPLICATIONS

- ▶ Indoor Lighting Control
- ▶ Outdoor Lighting Control
- ▶ Timing/Scheduling ON/OFF
- ▶ Machinery & Pump Controls

TECHNICAL DATA

| General | |
|--------------------------------|---|
| Model Number | ET91615CR |
| Description | Astronomic 365-Day 16-Circuit Electronic Control, 120-277 VAC, 50/60 Hz, 16-SPDT/8-DPDT, Outdoor Metal Enclosure, Ethernet Included |
| UPC Code | 078275124943 |
| Brand | Intermatic |
| Country of Origin (Intermatic) | MEXICO |
| Warranty Period | 3-Year limited |
| Control Specifications | |
| Minimum Pulse Time | 1 sec |
| Maximum Pulse Time | 23 hours, 59 minutes |
| Maximum ON/OFF Times | Indefinite |
| Time Presets | Flexible |
| Operation Features | Astronomic; Holiday |
| Operation Mode | 365 day |
| Data Transfer Options | Ethernet Optional/USB |
| Daylight Savings Adjustment | Automatic |
| Backup Restoration Time | 30 Minutes |

| | |
|------------------------|----------------|
| Backup Type | Supercapacitor |
| Backup Protection Time | 100 Hour |
| On Events | 2000 |
| Off Events | 2000 |
| Total Events | 2000 |

Mechanical Specifications

| | |
|----------------|-----------------------|
| Enclosure Type | Outdoor type 3R metal |
|----------------|-----------------------|

Dimensions

| | |
|-----------------------------------|----------------------|
| Product Dimensions (H x W x D) in | 17.9 x 12.7 x 5.4 in |
| Wire Size Min | #20 AWG |
| Wire Size Max | #6 AWG |

Material Specifications

| | |
|--------|-------|
| Color | Black |
| Finish | Gloss |

Communication Method

| | |
|----------|----|
| Has WiFi | No |
|----------|----|

Load Ratings

| | |
|--|--|
| Magnetic Ballast (NO) Range(s) | 20 A, 120-277 VAC |
| Magnetic Ballast (NC) Range(s) | 3 A, 120-277 VAC |
| Resistive (NO) Range(s) | 20 A, 28VDC; 30 A, 12-240 VAC |
| Resistive (NC) Range(s) | 10 A, 28 VDC; 10 A, 12-240 VAC |
| Pilot Duty (NO) Range(s) | 470 VA, 120-240 VAC |
| Pilot Duty (NC) Range(s) | 275 VA, 120-240 VAC |
| General Purpose (NC) Range(s) | 10 A, 12-240 VAC |
| General Purpose (NO) Range(s) | 30 A, 12-240 VAC |
| Electronic Ballast Load Ratings NO Ranges | 8 A, 120-277 VAC |
| Motor Load Ratings NC Ranges | 1/4 HP, 120 VAC, 50/60 Hz; 1/2 HP, 240 VAC, 50/60 Hz |
| Motor Load Ratings NO Ranges | 1 HP @ 120 VAC; 2 HP @ 240 VAC |
| Tungsten Incandescent Load Ratings NO Ranges | 5 A, 12-120 VAC |

Electrical Specifications

| | |
|-------------------------------|-----------------------|
| Voltage Selection Type | Auto-Voltage |
| Wiring Option | Terminals |
| Input Voltage Range(s) | 120-277 VAC, 50/60 Hz |
| Number of Circuits | 16 |
| Switch Type | 16xSPDT; 8xDPDT |
| Maximum Power Consumption (W) | 50 W |
| Electronic Series | ET90000 Series |
| Hz | 50/60 |
| Amperage | 30 A |

Packaging

| | |
|---------------------------------------|-----------------------|
| Shipping Weight (lbs) | 21.355 |
| Unit Carton Dimensions (H x W x L) in | 9 x 17.25 x 22.625 in |

Environmental Specifications

| | |
|-------------------------|--------------------------------------|
| Temperature (operation) | -40 °F to 104 °F / (-40 °C to 40 °C) |
|-------------------------|--------------------------------------|

Standards and Certifications

| | |
|--|--------------------------|
| UL Certification | cULus |
| CSA Certification | cCSAus |
| Other Certifications and Compatibilities | Title 20; Green Energy + |
| California Proposition 65 | Lead |
| RoHS Certification | N/A |

ACCESSORIES



ET-NF
RC Snubber Noise Filter 24-277 VAC for Electronic Controls



MS-101-WH
Commercial Grade Decorator Momentary Contact Switch