


## Weatherproof Cover - Extra-Duty Plastic In-Use Weatherproof Cover, Single-Gang, Vrt/Hrz, 2.75" Clear, 3/0 Adapter Plate

Item WP5103C

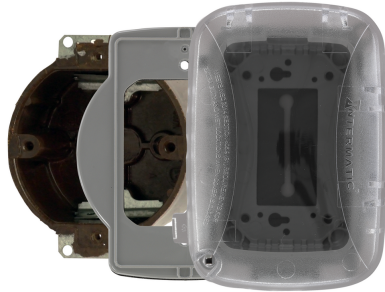

### PRODUCT DESCRIPTION

Plastic In-Use Weatherproof Covers are extra-duty rated and easy to install. Covers come with a gasket, mounting screws, base, cover assembly and inserts to meet the needs of a variety of applications.

### FEATURES

- ▶ Includes 3/0 adapter plate for 3" (76 mm) round box.
- ▶ Complies with 2020 NEC Article 406.9 (B)(1) for wet locations and extra-duty applications.
- ▶ CEC Article 26-702 Compliant.
- ▶ UL Certified for Type 3R outdoor enclosures.
- ▶ Meets requirements for cold impact testing: -60° F (-51° C).
- ▶ Heavy-duty UV stabilized polycarbonate cover, mounting base, and inserts.
- ▶ 1/8" (3 mm) thick, neoprene gasket with slits for mounting screws.
- ▶ Lockable hasp: All models accept up to 1/4" (6 mm) dia shank.
- ▶ Impact rated: 12 lbf. impact test to ensure cover remains intact.
- ▶ Reinforced hinge pin designed to exceed 40 lbf. hinge hang/stress test.

### APPLICATIONS

- ▶ Receptacle Protection

### TECHNICAL DATA

General	
Model Number	WP5103C
Description	Extra-Duty Plastic In-Use Weatherproof Cover, Single-Gang, Vrt/Hrz, 2.75" Clear, 3/0 Adapter Plate
UPC Code	078275147669
Brand	Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	1-Year limited
Mechanical Specifications	
Number of Included Inserts	3
Insert Types Included	WP17
Hinge Direction	Vertical/Horizontal
Is Extra-Duty Rated	Yes
Number of Receptacle/Switch Knockouts	4
Number of Gangs	Single
Mount Type	Horizontal; Vertical
Electrical Box Shape	Rectangle; Round
Dimensions	
Lockable Hasp Maximum Diameter (in)	1/4
Lockable Hasp Maximum Diameter (mm)	6
Product Dimensions (H x W x D) in	6.33 x 4.66 x 2.75 in
Accepted Cord Size Max	2x14 AWG; 1x12 AWG
Box Type	Single

**Material Specifications**

Color	Clear; Gray
Weatherproof Cover Material	UV Stabilized Plastic

**Packaging**

Shipping Weight (lbs)	0.56
Unit Carton Dimensions (H x W x L) in	6.5 x 2.75 x 4.75 in

**Standards and Certifications**

UL Certification	cULus
California Proposition 65	None
RoHS Certification	N/A

---

## ACCESSORIES



WP17  
Single-Gang Inserts (3)