


In-Wall Timer - Countdown Timer, White, 1HP, 30/1/2/4/8

Item EI-221-WK

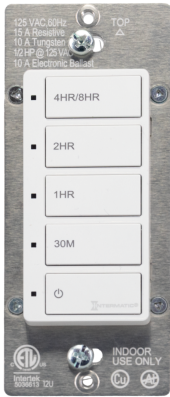

PRODUCT DESCRIPTION

5-button timer requires no programming; preset countdown times are activated by pressing a single button. Silent operation makes this timer ideal for applications where the noise of mechanical countdown timers is of concern. *NOTE: Not for use with sunlamps, saunas, or loads that could cause personal injury if timed incorrectly.

FEATURES

- ▶ No programming required.
- ▶ Provides silent operation in time ranges from thirty minutes to eight hours.
- ▶ Five-button time selection, with all models having an ON/OFF mode with Auto-OFF after 24 hours of operation.
- ▶ Replaces single-pole switches in a variety of applications.
- ▶ Interchangeable line/load leads, to simplify installations.
- ▶ "Double-time" dual-program mode adds versatility to top button.
- ▶ Optional color-change kit available in light almond.
- ▶ Requires neutral connection.
- ▶ For use with decorator-style wall plate (not included).
- ▶ Stylish blue LED indicators count down from top to bottom as the program time elapses.

APPLICATIONS

- ▶ Indoor Lighting Control
- ▶ Outdoor Lighting Control
- ▶ Air Movement & Ventilation

TECHNICAL DATA

General	
Model Number	EI-221-WK
Description	Countdown Timer, White, 1HP, 30/1/2/4/8
UPC Code	078275161245
Brand	Intermatic
Country of Origin (Intermatic)	VIETNAM
Warranty Period	2-Year limited
Control Specifications	
Time Presets	30 min; 1 hr; 2 hrs; 4 hrs; 8 hrs
Operation Mode	Countdown
Countdown Time	8 hrs
Hold Mode Included	Yes, with 24-hour auto-off
Mechanism Type	Digital/Electronic
Application Compatibilities	Incandescent; Fluorescent; CFL; LED
On Events	1
Total Events	1
Mechanical Specifications	
Wall Plate Configurations	Single-Gang
Dimensions	
Product Dimensions (H x W x D) in	4.125 x 1.688 x 1.5 in



Material Specifications

Color	White
Includes Wall Plate	No
Finish	Gloss

Load Ratings

Resistive Heater	20 A, 2500 W
Electronic Ballast LED	10 A
Magnetic Ballast (NO) Range(s)	10 A
General Purpose (NO) Range(s)	15 A, 125 VAC
Tungsten Incandescent (NO) Range(s)	10 A, 1250 W

Electrical Specifications

Input Voltage Range(s)	125 VAC, 60 Hz
Wiring Configurations	Single
Switch Type	SPST-NO
Neutral Connection Required	Yes

Environmental Specifications

Temperature (operation)	32 - 104 °F / 0 - 40 °C
-------------------------	-------------------------

Packaging

Shipping Weight (lbs)	0.45
Unit Carton Dimensions (H x W x D) in	5.12 x 2.97 x 2.56 in

Standards and Certifications

Other Certifications and Compatibilities	Green Energy; cETLus
California Proposition 65	Bisphenol A (BPA)
RoHS Certification	N

ACCESSORIES



EI-221COV-LA
EI-221 Light Almond Cover



EI-221COV-WH
EI-221 White Cover