


**In-Wall Timer** - Countdown Timer, White+Light Almond, 1HP, 30/1/2/4/8

Item EI-221-WLA

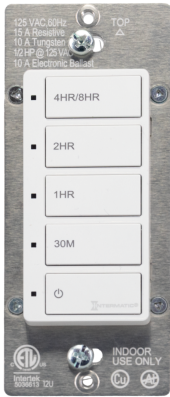

**PRODUCT DESCRIPTION**

5-button timer requires no programming; preset countdown times are activated by pressing a single button. Silent operation makes this timer ideal for applications where the noise of mechanical countdown timers is of concern. \*NOTE: Not for use with sunlamps, saunas, or loads that could cause personal injury if timed incorrectly.

**FEATURES**

- ▶ No programming required.
- ▶ Provides silent operation in time ranges from thirty minutes to eight hours.
- ▶ Five-button time selection, with all models having an ON/OFF mode with Auto-OFF after 24 hours of operation.
- ▶ Replaces single-pole switches in a variety of applications.
- ▶ Interchangeable line/load leads, to simplify installations.
- ▶ "Double-time" dual-program mode adds versatility to top button.
- ▶ Optional color-change kit available in light almond.
- ▶ Requires neutral connection.
- ▶ For use with decorator-style wall plate (not included).
- ▶ Stylish blue LED indicators count down from top to bottom as the program time elapses.

**APPLICATIONS**

- ▶ Indoor Lighting Control
- ▶ Outdoor Lighting Control
- ▶ Air Movement & Ventilation

**TECHNICAL DATA**

| General                           |                                                      |
|-----------------------------------|------------------------------------------------------|
| Model Number                      | EI-221-WLA                                           |
| Description                       | Countdown Timer, White+Light Almond, 1HP, 30/1/2/4/8 |
| UPC Code                          | 078275161580                                         |
| Brand                             | Intermatic                                           |
| Country of Origin (Intermatic)    | VIETNAM                                              |
| Warranty Period                   | 2-Year limited                                       |
| Control Specifications            |                                                      |
| Time Presets                      | 30 min; 1 hr; 2 hrs; 4 hrs; 8 hrs                    |
| Operation Mode                    | Countdown                                            |
| Countdown Time                    | 8 hrs                                                |
| Hold Mode Included                | Yes                                                  |
| Mechanism Type                    | Digital/Electronic                                   |
| Application Compatibilities       | Incandescent; Fluorescent; CFL; LED                  |
| On Events                         | 1                                                    |
| Total Events                      | 1                                                    |
| Mechanical Specifications         |                                                      |
| Wall Plate Configurations         | Single-Gang                                          |
| Dimensions                        |                                                      |
| Product Dimensions (H x W x D) in | 4.125 x 1.688 x 1.5 in                               |



| Material Specifications                  |                         |
|------------------------------------------|-------------------------|
| Color                                    | White                   |
| Includes Wall Plate                      | No                      |
| Finish                                   | Gloss                   |
| Load Ratings                             |                         |
| Resistive Heater                         | 20 A, 2500 W            |
| Electronic Ballast LED                   | 10 A                    |
| Magnetic Ballast (NO) Range(s)           | 10 A                    |
| General Purpose (NO) Range(s)            | 15 A, 125 VAC           |
| Tungsten Incandescent (NO) Range(s)      | 10 A, 1250 W            |
| Electrical Specifications                |                         |
| Input Voltage Range(s)                   | 125 VAC, 60 Hz          |
| Wiring Configurations                    | Single                  |
| Switch Type                              | SPST-NO                 |
| Neutral Connection Required              | Yes                     |
| Environmental Specifications             |                         |
| Temperature (operation)                  | 32 - 104 °F / 0 - 40 °C |
| Packaging                                |                         |
| Shipping Weight (lbs)                    | 0.47                    |
| Unit Carton Dimensions (H x W x D) in    | 5.11 x 2.97 x 2.56 in   |
| Standards and Certifications             |                         |
| Other Certifications and Compatibilities | Green Energy; cETLus    |
| California Proposition 65                | Bisphenol A (BPA)       |
| RoHS Certification                       | N                       |

ACCESSORIES



EI-221COV-LA  
EI-221 Light Almond Cover



EI-221COV-WH  
EI-221 White Cover