
Occupancy Sensor - Commercial Grade Low-Voltage Power Pack, Mexico Sales Only

Item IOS-PP24MX

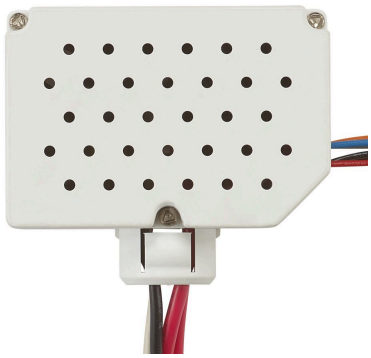

NOM

PRODUCT DESCRIPTION

An IOS-PP24 power pack is required to provide power to the IOS-CMP-LV sensor and enable a manual ON for the vacancy sensor.

FEATURES

- Powers up to 6 Intermatic Low Voltage Sensors.
- Zero-crossing technology for long life and performance.
- Incandescent/Fluorescent/CFL/LED compatible.
- 24 V Power Supply.
- Mounts directly to standard or deep 4" junction box.
- Allows for remote switch override.

TECHNICAL DATA

General	
Model Number	IOS-PP24MX
Description	Commercial Grade Low-Voltage Power Pack, Mexico Sales Only
UPC Code	078275139930
Brand	Intermatic
Warranty Period	2-Year limited
Country of Origin (Intermatic)	CHINA

Control Specifications	
Sensor Switch Type	Low-Voltage Power Pack
Sensor Technology	Zero-crossing
PIR Coverage Area (sq ft)	Depends on sensor being used
Application Compatibilities	Incandescent; Fluorescent; CFL; LED

Mechanical Specifications	
Maximum Mounting Height (ft)	No maximum mounting height

Dimensions	
Product Height (in)	2.75
Product Height (mm)	70
Product Width (in)	1 15/16
Product Width (mm)	49
Product Depth (in)	1.625
Product Depth (mm)	41

Material Specifications	
Color	White
Includes Wall Plate	No

Load Ratings

Magnetic Ballast (NO) Range(s)	20 A, 120/230/240/277 VAC
Tungsten Incandescent (NO) Range(s)	15 A, 120 VAC; 5 A, 250 VAC

Electrical Specifications	
Input Voltage Range(s)	120/230/240/250/277 VAC, 50/60 Hz
Occupancy Sensor Power Type	Low Voltage
Neutral Connection Required	Yes

Packaging	
Shipping Weight (lbs)	0.349
Shipping Weight (kg)	0.158
Unit Carton Dimensions (H x W x L) in	2.5 x 3 x 3.75 in

Environmental Specifications	
Temperature (operation)	32 - 131°F / 0 - 55°C

Standards and Certifications	
Other Certifications and Compatibilities	NOM
California Proposition 65	None

Technical specifications and other information are subject to change without notice. Images can vary from original.