

# ABRA In-Wall Smart Switch

SH-ABIWS1-WH



## A New Way to *Spell* Smart Lighting

### Best-in-Class Performance, Everyday Convenience

Simplify smart lighting projects with the ABRA In-Wall Smart Switch from Intermatic. Our versatile in-wall control makes it easy to create daily ON/OFF schedules, smart lighting scenes, and smart home automations while maintaining a familiar decorator-style aesthetic.


Ideal for both residential and light commercial applications, the smart switch features an impressive input voltage range of 120-277 VAC, 50/60 Hz and is an excellent choice for controlling entrance lights, coach lights, fans, small motors, and more!

### Common Applications

- Front door/entrance lights
- Coach lights
- Garage lights
- Hallway lights
- Common area lighting
- Retail stores/signage
- Fans
- Small motors



**SH-ABIWS1-WH**  
ABRA In-Wall Smart Switch

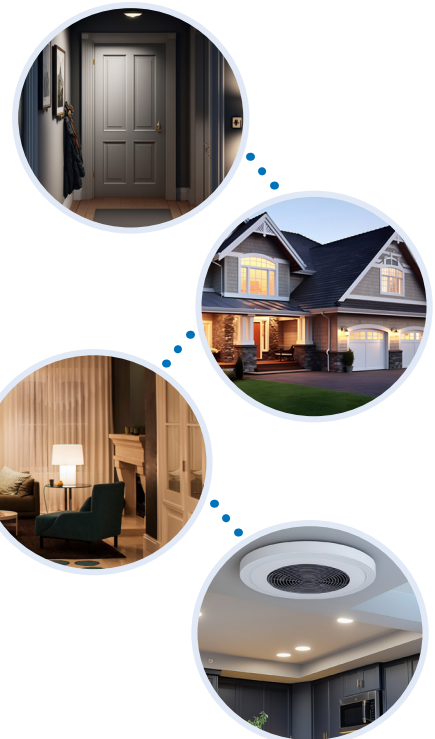

# ABRA In-Wall Smart Switch - SH-ABIWS1-WH

## Benefits

### Best-in-Class Performance

The ABRA In-Wall Smart Switch offers an impressive input voltage range of 120-277 VAC, 50/60 Hz rating and supports electronic ballast/LED loads up to 10A.

### Robust Scheduling

Once installed, the ABRA app allows users to create 7-day Astronomic ON/OFF schedules as well as lighting scenes and smart home automations. Users can also manually control lights at the switch or via the app without disrupting schedules/settings.

### Flexible, Cost-Saving Installation

The easy-to-install switch can be used in new construction and retrofit projects. It supports both single-pole and 3-way applications. In multi-way installations, the In-Wall Smart Switch can be paired with a standard 3-way light switch and does not require a special relay or companion switch.

### No Hub Required

Install and configure the In-Wall Smart Switch in any home or business using familiar Bluetooth® technology and basic 2.4 GHz Wi-Fi—no smart hub required.

### Smart Integration

Take advantage of true smart home functionality with app-driven automations and lighting scenes. The smart switch also supports Alexa, Google Home, and Siri for simple voice control and smart home integration.

### Matter Certified

Control the In-Wall Smart Switch seamlessly with third-party Matter-compatible smart home platforms like Google Home, Amazon Alexa, Apple Home, and Samsung SmartThings



## Specifications

Specifications	ABRA In-Wall Smart Switch
Operating Voltage	120 - 277 VAC ; 50/60 Hz
General Purpose	15 A
Inductive Ballast	10 A
Tungsten/Incandescent	15 A
Electronic Ballast/LED	10 A
Motor Load	1 HP @ 120 VAC; 3 HP @ 240 VAC
Wire Configuration	Single-pole, 3-way
Optional Almond Switch Cover	Yes (SH-ABSWCOV-LA, sold separately)
7-Day Astronomic Scheduling	Yes
App-driven Automations	Yes
Simple Device Discovery via Bluetooth®	Yes
Matter Support	Yes
Dimming Functionality	No
Warranty	Two-year limited warranty



**WANT TO KNOW MORE**  
Scan QR code to learn more  
about the ABRA  
In-Wall Smart Switch

Contact your local Intermatic Sales Representative today to learn about this exciting new product.

