


Lighting Controllers - 1-Channel Phase Dimming Lighting Controller

Item ALC1-P

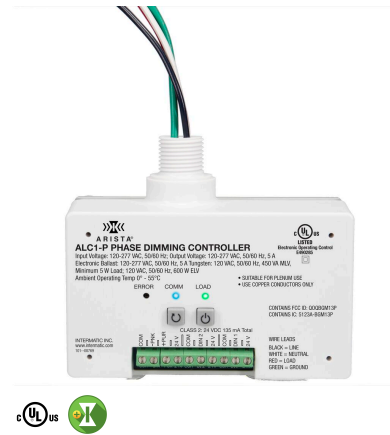

PRODUCT DESCRIPTION

The ALC1-P is a single-channel phase dimming controller designed to work with ARISTA® Lighting Control System by Intermatic. These units can work with Electronic Ballast/LED, Tungsten, MLV, or ELV loads. Once installed, the ALC1-P unit(s) can be configured to work off of either scheduling, sensing, or a combination of both, providing maximum energy efficiency as well as occupant comfort. These units can be configured for either wireless or wired communications, and utilize Bluetooth Mesh technologies for wireless communications. Pricing is available upon request.

FEATURES

- ▶ Wired or wireless communications.
- ▶ Provides 24 VDC for wired devices.
- ▶ Utilizes a secure bluetooth mesh for connectivity.
- ▶ Built-in real time clock for keeping timing accuracy.
- ▶ Allows for 1 wired analog input.
- ▶ Allows for 2 wired digital inputs.
- ▶ Works with LED/Electronic ballast, tungsten, MLV, or ELV loads.
- ▶ 365-Day scheduling including holidays.
- ▶ Programmable blink warning alert.
- ▶ Programmable light levels.

APPLICATIONS

- ▶ Indoor Lighting Control
- ▶ Timing/Scheduling ON/OFF
- ▶ Dimming

TECHNICAL DATA

General	
Model Number	ALC1-P
Description	1-Channel Phase Dimming Lighting Controller
UPC Code	078275150690
Brand	Intermatic
Warranty Period	5-Year limited
Country of Origin (Intermatic)	CHINA
Control Specifications	
Operation Features	Holiday; Astronomic; Daylight Saving Time; Countdown
Operation Mode	365 day; Countdown
Data Transfer Options	Bluetooth
Daylight Savings Adjustment	Automatic
Backup Type	Battery
Backup Protection Time	10 Years
On/Off Operations per Channel	256
Application Compatibilities	ELV (Electronic Low Voltage); Incandescent; LED; MLV (Magnetic Low Voltage); Tungsten
Function type	Dimming; Remote Controllable; Scheduled Dimming; Scheduled ON/OFF
Mechanical Specifications	
Plenum Rated	Yes
Mount Type	Box

Dimensions	
Product Height (in)	5
Product Height (mm)	127
Product Width (in)	4.17
Product Width (mm)	105.918
Product Depth (in)	2.05
Product Depth (mm)	52.07
Communication Method	
Radio signal	Bluetooth
Low Voltage	Analog; Digital
Load Ratings	
Magnetic Ballast Range(s)	5 A, 120-277 VAC
Tungsten Range(s)	5 A, 120-277 VAC
Electronic Ballast Load Ratings Ranges	5 A, 120-277 VAC
Electronic Low Voltage	600 W
Magnetic Low Voltage	450 VA Minimum Load 5 W
Electrical Specifications	
Voltage Selection Type	Auto Voltage 120-277
Input Voltage Range(s)	120-277 VAC, 60 Hz
Switch Type	SPST
Neutral Connection Required	Yes
Wiring Options Line Voltage	Pigtails
Wiring Options Low Voltage	Pigtails; Terminals
Hz	60
Power Connection	
External inputs	Analog; Digital
Display and Format	
Status Indicator	LED
Packaging	
Shipping Weight (lbs)	0.6
Shipping Weight (kg)	0.272
Product Weight (lbs)	1
Product Weight (kg)	0.453
Operating Specifications	
Programming Targets	Smartphone
Tampering protection	Yes
Environmental Specifications	

Temperature (operation)	32°F..131°F
Temperature (operation)	0°C..55°C
Usage Environments	Indoor

Standards and Certifications	
UL Certification	cULus
Other Certifications and Compatibilities	Ashrae 90.1 2016; IECC 2018; Green Energy +
California Proposition 65	DEHP; Lead
RoHS Certification	X