
Weatherproof Cover - Extra-Duty Plastic In-Use Weatherproof Cover, Double-Gang, Vrt, 4.75" Yellow

Item WP5500Y

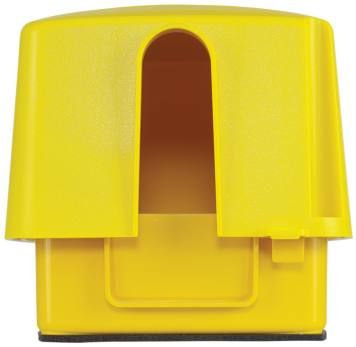

FEATURES

- Complies with 2020 NEC Article 406.9 (B)(1) for wet locations and extra-duty applications.
- CEC Article 26-702 Compliant.
- UL Certified for Type 3R outdoor enclosures.
- Meets requirements for cold impact testing: -60° F (-51° C).
- Heavy-duty UV stabilized polycarbonate cover, mounting base, and inserts.
- 1/8" (3 mm) thick, pre-adhered neoprene gasket with slits for mounting screws.
- Lockable hasp: All models accept up to 1/4" (6 mm) dia. shank.
- Impact rated: 12 lb. impact test to ensure cover remains intact.
- Reinforced hinge pin designed to exceed 40 lb. hinge hang/stress test.
- Warranty: 1-year limited.

APPLICATIONS

- Receptacle Protection

TECHNICAL DATA

General	
Model Number	WP5500Y
Description	Extra-Duty Plastic In-Use Weatherproof Cover, Double-Gang, Vrt, 4.75" Yellow
UPC Code	078275146174
Brand	Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	1-Year limited

Mechanical Specifications	
Number of Included Inserts	6
Insert Types Included	WP107; WP213
Hinge Direction	Vertical
Is Extra-Duty Rated	Yes
Number of Gangs	Double
Electrical Box Shape	Square

Dimensions	
Lockable Hasp Maximum Diameter (in)	1/4
Lockable Hasp Maximum Diameter (mm)	6
Product Dimensions (H x W x D) in	6 x 6 5/8 x 4 3/4 in
Accepted Cord Size Max	1x6 AWG
Box Type	Double

Material Specifications	
Color	Yellow
Weatherproof Cover Material	UV Stabilized Plastic


Packaging	
Shipping Weight (lbs)	1.1

Technical specifications and other information are subject to change without notice. Images can vary from original.


Unit Carton Dimensions (H x W x L) in	6.5 x 4 x 6.5 in

Standards and Certifications	
UL Certification	cULus
CSA Certification	cCSAus
California Proposition 65	None

ACCESSORIES



WP107
Double-Gang Round Insert, 1 3/8”, 1 5/8”, 1 3/4"



WP213
Double-Gang Round Insert, 2 1/8”, 2 5/8”